

CHIEFLY

- ▶ CPU COOLER
- ▶ DC FAN
- ▶ AC FAN
- ▶ VGA COOLER

www.chiefly-choice.com.tw

CHIEFLY FAN GENERAL SPECIFICATION

*FRAME	:PBT GLASS FIBER ALLOY OR ALUMINUM DIE-CASTING
*IMPELLER	:PBT GLASS FIBER ALLOY
*BEARING	:BALL BEARING SYSTEM OR SLEEVE BEARING SYSTEM
*MOTOR	:BRUSHLESS / INUCTION DC & AC MOTOR
*CONNECTION	:LEAD WIRE OR TERMINAL TYPE
*PROTECTION	:IMPEDANCE OR POLARITY PROTECTION
*OPERATING TEMPERATURE	:BALL BEARING :-40°C ~70°C SLEEVE BEARING :-20°C ~70°C
*INSULATION	:ABOVE 100MΩ,DC 500V
*DIELECTRIC STRENGTH	:AC 1500V/ 1 min
*LIFE EXPECTANCY	:BALL BEARING: OVER 40,000 HR, (AT 40°C) ONE BALL BEARING: OVER 32,000 HR, (AT 40°C) SLEEVE BEARING : OVER 25,000 HR, (AT 40°C)
*OPERATING VOLTAGE	:110/120 V RANGED VOLTAGE FROM 85V TO 125V 220/230 V RANGED VOLTAGE FROM 190V TO 245V
*SAFETY APPROVAL	UL CUL TUV CE

Technical Formular

Air Flow

- *1 CFM= 0.028317 m³/min(CMM)
- *1 m³/min= 35.31 CFM
- *1 l/Sec= 0.06 m³/min
- *1 m³/min= 16.67 l/Sec

Air Pressure

- *1 Pa= 0.102 mm-H2O(mm-Aq)
- *1 mm-H2O= 9.8 Pa
- *1 mm-H2O= 0.0394 inch-H2O
- *1 inch-H2O= 25.4 mm-H2O
- *1 inch-H2O= 249 Pa

DESCRIPTION OF MODEL NO

DIMENSION	BEARING	VOLTAGE	SPEED	CONNECTION
<u>12038</u> 120×120×38mm	<u>B</u> B:BALL	<u>110</u> 100-125VAC	<u>H</u> H:HIGH	<u>T</u> T:TERMINAL TYPE
<u>8025</u> 80×80×25mm	S:SLEEVE	<u>220</u> 220-240VAC	M:MEDIUM L: LOW	L:LEAD WIRE
<u>8038</u> 80×80×38mm				
<u>9225</u> 92×92×25mm				
<u>12025</u> 120×120×25mm				
<u>12038</u> 120×120×38mm				
<u>17251</u> 172×150×51mm				

NOISE LEVEL RANGE IS DEPENDING ON THE SPEED AND MODEL SELECTED

AC AXIAL FAN




CC-25489 SERIES

FEATURES

SIZE:	254×254×89 mm
BEARING TYPE:	BALL BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	1940(g)

PERFORMANCE & DIMENSIONS

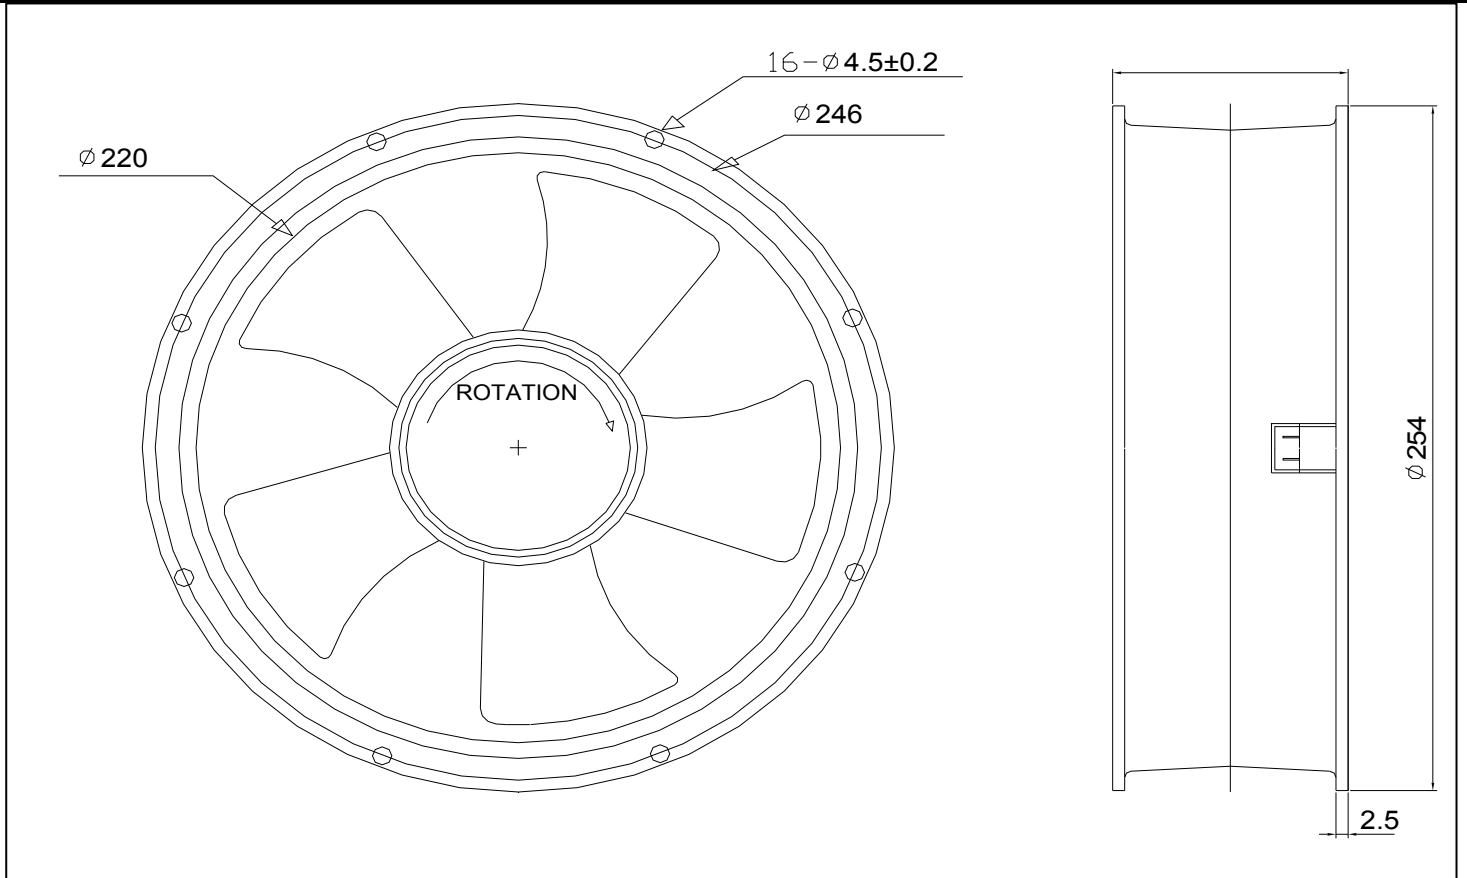

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 25489B110H	Ball	110/120	50/60	0.44/0.55	50/66	2500/2500	850/850	66/66
CC 25489B220H	Ball	220/240	50/60	0.22/0.28	50/62	2500/2500	850/850	66/66

AC AXIAL FAN




CC-17251 SERIES

FEATURES

SIZE:	172×150×51 mm
BEARING TYPE:	BALL BEARING & SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	950(g)

PERFORMANCE & DIMENSIONS

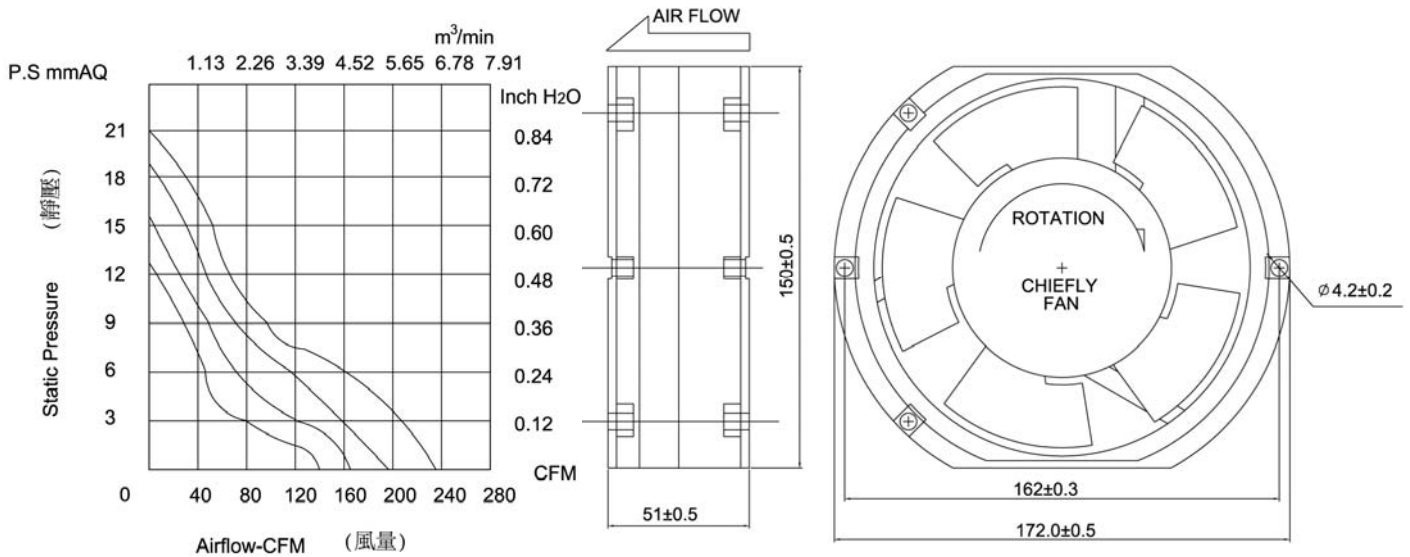

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 17251S110H	Sleeve	110/120	50/60	0.54/0.44	40	3000	200/220	50/55
CC 17251B110H	Ball	110/120	50/60	0.54/0.44	40	3000	200/220	50/55
CC 17251S220H	Sleeve	220/240	50/60	0.30/0.23	40	3000	200/220	50/55
CC 17251B220H	Ball	220/240	50/60	0.30/0.23	40	3000	200/220	50/55
CC 17251S110M	Sleeve	110/120	50/60	0.50/0.40	31	2600	175/195	40/45
CC 17251B110M	Ball	110/120	50/60	0.50/0.40	31	2600	175/195	40/45
CC 17251S220M	Sleeve	220/240	50/60	0.26/0.21	31	2600	175/195	40/45
CC 17251B220M	Ball	220/240	50/60	0.26/0.21	31	2600	175/195	40/45
CC 17251S110L	Sleeve	110/120	50/60	0.40/0.31	24	2200	155/175	33/38
CC 17251B110L	Ball	110/120	50/60	0.40/0.31	24	2200	155/175	33/38
CC 17251S220L	Sleeve	220/240	50/60	0.19/0.17	24	2200	155/175	33/38
CC 17251B220L	Ball	220/240	50/60	0.19/0.17	24	2200	155/175	33/38

AC AXIAL FAN




CC-17238 SERIES

FEATURES

SIZE:	172×150×38 mm
BEARING TYPE:	BALL BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	720(g)

PERFORMANCE & DIMENSIONS

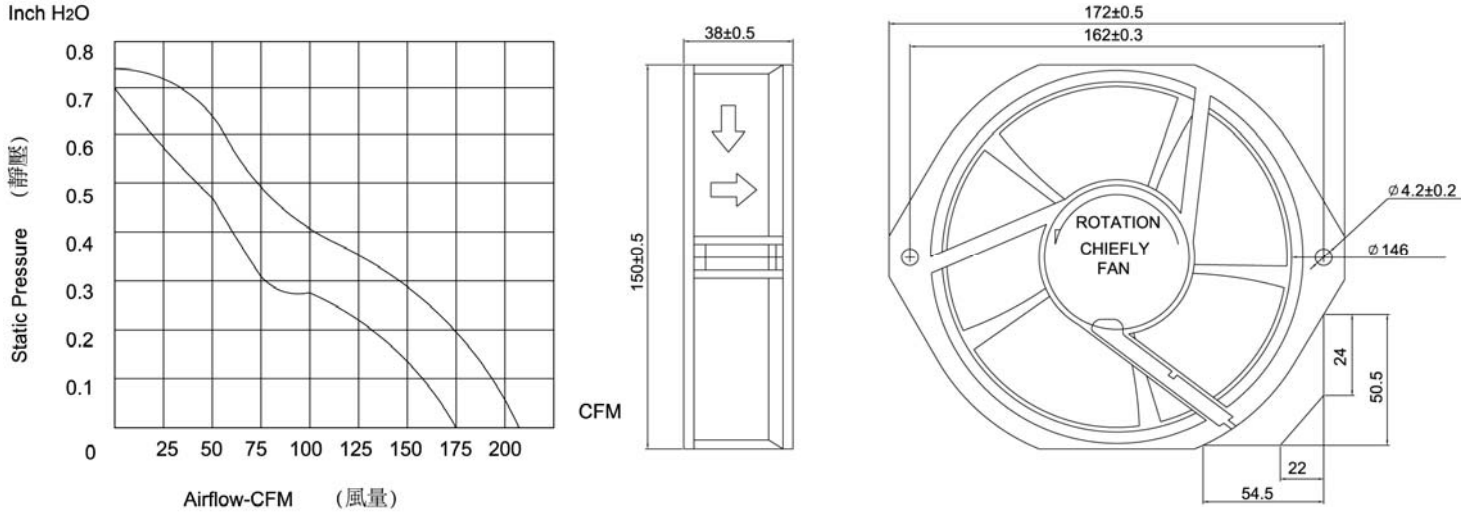

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 17238B110H	Ball	110/120	50/60	0.40/0.38	30/28	2700/2900	205/230	54/58
CC 17238B220H	Ball	220/240	50/60	0.28/0.23	38/35	2700/2900	205/230	54/58

AC AXIAL FAN




CC-12038 SERIES

FEATURES

SIZE:	120×120×38 mm
BEARING TYPE:	BALL BEARING & SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	550(g)

PERFORMANCE & DIMENSIONS

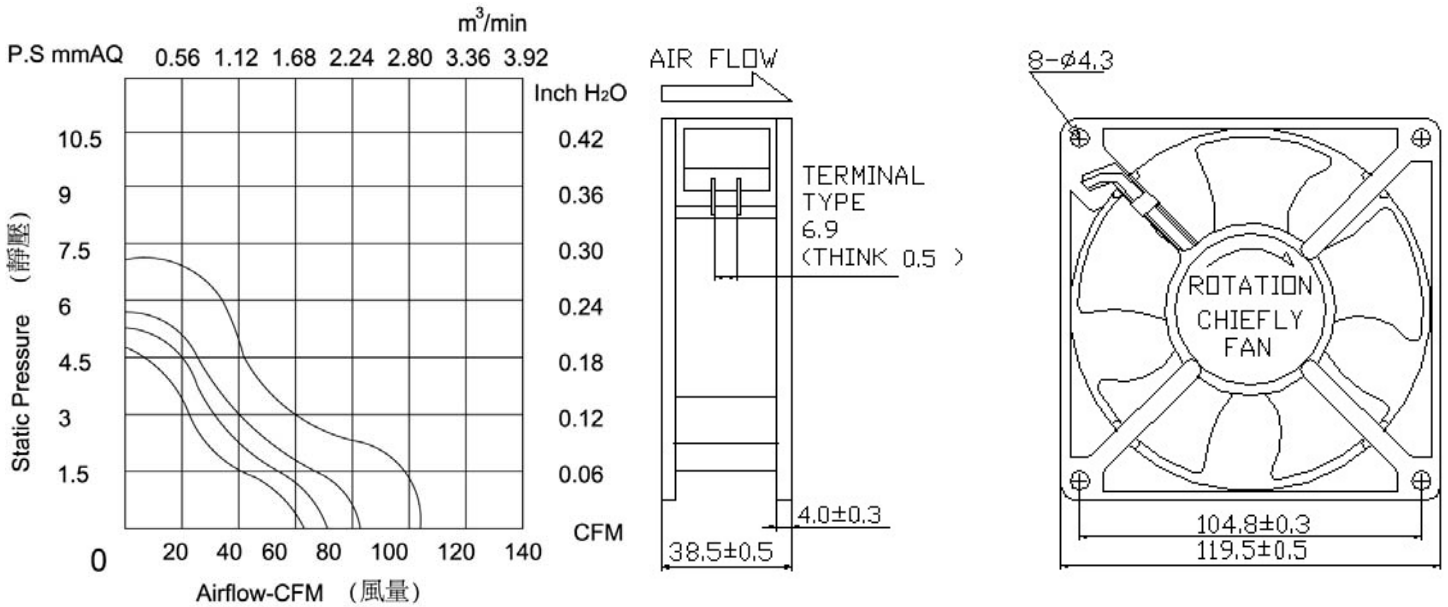

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 12038S110H	Sleeve	110/120	50/60	0.22/0.19	20	3000	95/115	44/49
CC 12038B110H	Ball	110/120	50/60	0.22/0.19	20	3000	95/115	44/49
CC 12038S220H	Sleeve	220/240	50/60	0.10/0.08	20	3000	95/115	44/49
CC 12038B220H	Ball	220/240	50/60	0.10/0.08	20	3000	95/115	44/49
CC 12038S110M	Sleeve	110/120	50/60	0.19/0.16	18	2600	85/93	36/40
CC 12038B110M	Ball	110/120	50/60	0.19/0.16	18	2600	85/93	36/40
CC 12038S220M	Sleeve	220/240	50/60	0.09/0.07	18	2600	85/93	36/40
CC 12038B220M	Ball	220/240	50/60	0.09/0.07	18	2600	85/93	36/40
CC 12038S110L	Sleeve	110/120	50/60	0.16/0.13	16	2200	74/82	33/36
CC 12038B110L	Ball	110/120	50/60	0.16/0.13	16	2200	74/82	33/36
CC 12038S220L	Sleeve	220/240	50/60	0.08/0.06	16	2200	74/82	33/36
CC 12038B220L	Ball	220/240	50/60	0.08/0.06	16	2200	74/82	33/36

AC AXIAL FAN




CC-12025 SERIES

FEATURES

SIZE:	120×120×25 mm
BEARING TYPE:	BALL BEARING & SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	380(g)

PERFORMANCE & DIMENSIONS

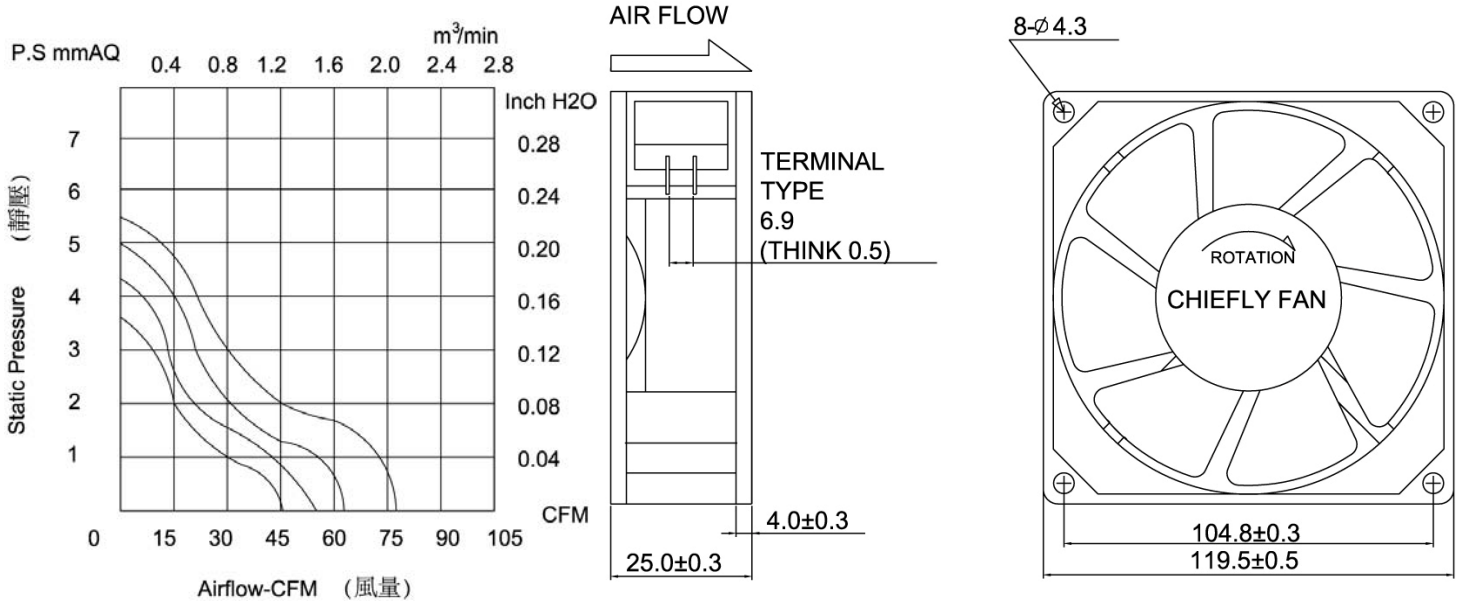

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 12025S110H	Sleeve	110/120	50/60	0.22/0.19	18	2800	70/85	38/42
CC 12025B110H	Ball	110/120	50/60	0.22/0.19	18	2800	70/85	38/42
CC 12025S220H	Sleeve	220/240	50/60	0.10/0.08	18	2800	70/85	38/42
CC 12025B220H	Ball	220/240	50/60	0.10/0.08	18	2800	70/85	38/42
CC 12025S110M	Sleeve	110/120	50/60	0.19/0.16	15	2600	60/68	35/39
CC 12025B110M	Ball	110/120	50/60	0.19/0.16	15	2600	60/68	35/39
CC 12025S220M	Sleeve	220/240	50/60	0.09/0.07	15	2600	60/68	35/39
CC 12025B220M	Ball	220/240	50/60	0.09/0.07	15	2600	60/68	35/39
CC 12025S110L	Sleeve	110/120	50/60	0.16/0.13	12	2200	51/57	31/33
CC 12025B110L	Ball	110/120	50/60	0.16/0.13	12	2200	51/57	31/33
CC 12025S220L	Sleeve	220/240	50/60	0.08/0.06	12	2200	51/57	31/33
CC 12025B220L	Ball	220/240	50/60	0.08/0.06	12	2200	51/57	31/33

AC AXIAL FAN




CC-9225 SERIES

FEATURES

SIZE:	92×92×25 mm
BEARING TYPE:	BALL BEARING & SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	280(g)

PERFORMANCE & DIMENSIONS

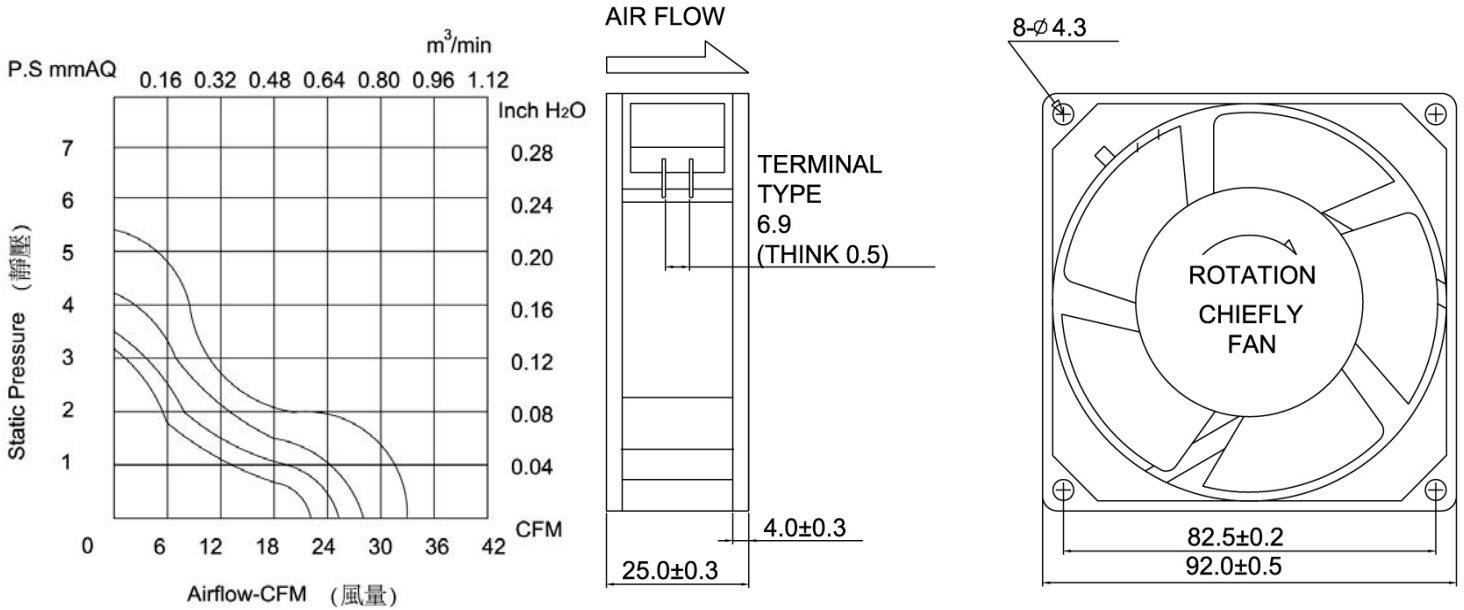

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 9225S110H	Sleeve	110/120	50/60	0.20/0.18	19	2800	42/38	35/37
CC 9225B110H	Ball	110/120	50/60	0.20/0.18	19	2800	42/38	35/37
CC 9225S220H	Sleeve	220/240	50/60	0.11/0.10	19	2800	42/38	35/37
CC 9225B220H	Ball	220/240	50/60	0.11/0.10	19	2800	42/38	35/37
CC 9225S110M	Sleeve	110/120	50/60	0.14/0.11	18	2600	36/32	33/35
CC 9225B110M	Ball	110/120	50/60	0.14/0.11	18	2600	36/32	33/35
CC 9225S220M	Sleeve	220/240	50/60	0.09/0.07	18	2600	36/32	33/35
CC 9225B220M	Ball	220/240	50/60	0.09/0.07	18	2600	36/32	33/35
CC 9225S110L	Sleeve	110/120	50/60	0.11/0.09	17	2200	30/26	27/30
CC 9225B110L	Ball	110/120	50/60	0.11/0.09	17	2200	30/26	27/30
CC 9225S220L	Sleeve	220/240	50/60	0.08/0.06	17	2200	30/26	27/30
CC 9225B220L	Ball	220/240	50/60	0.08/0.06	17	2200	30/26	27/30

AC AXIAL FAN






CC-8038 SERIES

FEATURES

SIZE:	80×80×38 mm
BEARING TYPE:	BALL BEARING & SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	370(g)

PERFORMANCE & DIMENSIONS

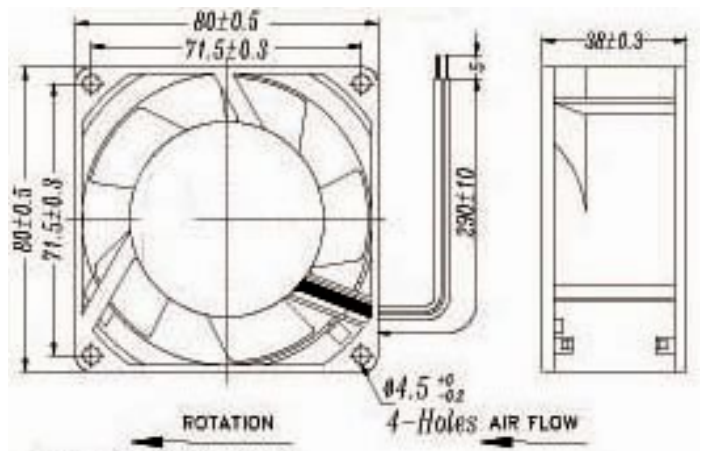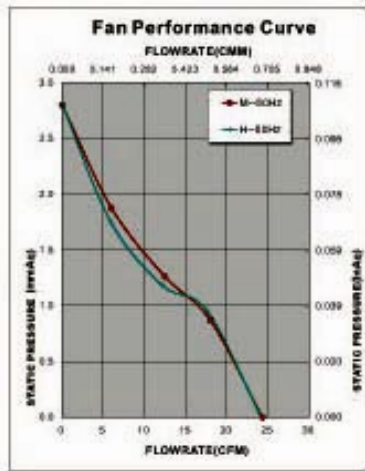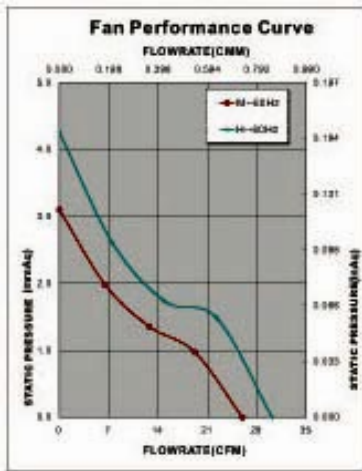

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 8038S110H	Sleeve	110/120	50/60	0.14/0.12	14	2800	27/30	30/35
CC 8038B110H	Ball	110/120	50/60	0.14/0.12	14	2800	27/30	30/35
CC 8038S220H	Sleeve	220/240	50/60	0.10/0.08	14	2800	27/30	30/35
CC 8038B220H	Ball	220/240	50/60	0.10/0.08	14	2800	27/30	30/35
CC 8038S110M	Sleeve	110/120	50/60	0.12/0.10	11	2600	22/26	24/27
CC 8038B110M	Ball	110/120	50/60	0.12/0.10	11	2600	22/26	24/27
CC 8038S220M	Sleeve	220/240	50/60	0.08/0.06	11	2600	22/26	24/27
CC 8038B220M	Ball	220/240	50/60	0.08/0.06	11	2600	22/26	24/27
CC 8038S110L	Sleeve	110/120	50/60	0.10/0.08	7	2200	18/20	21/23
CC 8038B110L	Ball	110/120	50/60	0.10/0.08	7	2200	18/20	21/23
CC 8038S220L	Sleeve	220/240	50/60	0.06/0.04	7	2200	18/20	21/23
CC 8038B220L	Ball	220/240	50/60	0.06/0.04	7	2200	18/20	21/23

AC AXIAL FAN




CC-8025 SERIES

FEATURES

SIZE:	80×80×25 mm
BEARING TYPE:	BALL BEARING & SLEEVE BEARING
IMPELLER:	PLASTIC WITH FIBER GLASS FILLED UL 94V-0
FRAME:	DIE CAST ALUMINUM
WEIGHT:	270(g)







PERFORMANCE & DIMENSIONS

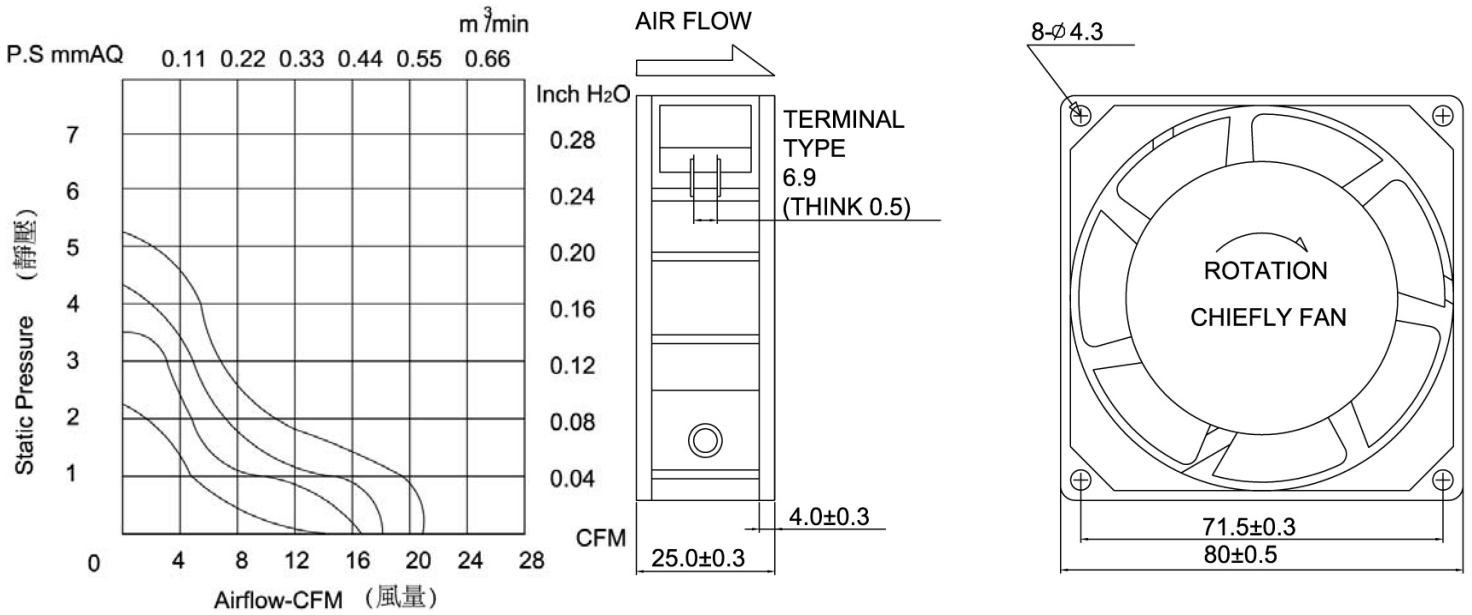

Model No.	Bearing	Rated Voltage (VAC)	Freq (Hz)	Current (A)	Input Power (Watts)	Speed (RPM)	Air Flow (CFM)	Noise Level (dBA)
CC 8025S110H	Sleeve	110/120	50/60	0.16/0.14	18	2800	36/32	33/35
CC 8025B110H	Ball	110/120	50/60	0.16/0.14	18	2800	36/32	33/35
CC 8025S220H	Sleeve	220/240	50/60	0.11/0.10	18	2800	36/32	33/35
CC 8025B220H	Ball	220/240	50/60	0.11/0.10	18	2800	36/32	33/35
CC 8025S110M	Sleeve	110/120	50/60	0.14/0.11	16	2600	33/29	30/33
CC 8025B110M	Ball	110/120	50/60	0.14/0.11	16	2600	33/29	30/33
CC 8025S220M	Sleeve	220/240	50/60	0.09/0.07	16	2600	33/29	30/33
CC 8025B220M	Ball	220/240	50/60	0.09/0.07	16	2600	33/29	30/33
CC 8025S110L	Sleeve	110/120	50/60	0.12/0.10	14	2200	30/26	27/30
CC 8025B110L	Ball	110/120	50/60	0.12/0.10	14	2200	30/26	27/30
CC 8025S220L	Sleeve	220/240	50/60	0.08/0.06	14	2200	30/26	27/30
CC 8025B220L	Ball	220/240	50/60	0.08/0.06	14	2200	30/26	27/30

DC BRUSHLESS FAN GENERAL SPECIFICATION

*FRAME	:PBT GLASS FIBER ALLOY UL94V-0 RATING
*IMPELLER	:PBT GLASS FIBER ALLOY UL94V-0 RATING
*BEARING	:BALL BEARING SYSTEM , SLEEVE BEARING SYSTEM ONE BALL BEARING SYSTEM AND CERAMIC SYSTEM
*MOTOR	:BRUSHLESS DC MOTOR RH 20%~80%
*PROTECTION	:IMPEDANCE OR POLARITY PROTECTION
*OPERATING TEMPERATURE	:BALL BEARING :-20°C ~80°C SLEEVE BEARING :-10°C ~70°C
*INSULATION RESISTANCE	:10 MEGOHMS MINIMUM AT 500 VDC
*DIELECTRIC STRENGTH	:1 MINIMUM AT 500 VAC/60Hz (BETWEEN FRAME AND TERMINAL)
*OPERATING VOLTAGE	:RATED VOLTAGE ± 15%
*SAFETY APPROVAL	:UL CUL TUV CE
*Wave Form of IC Function	

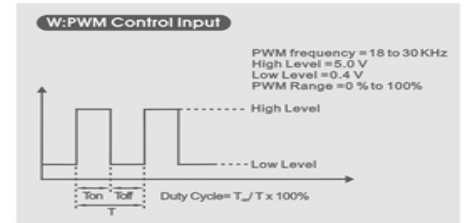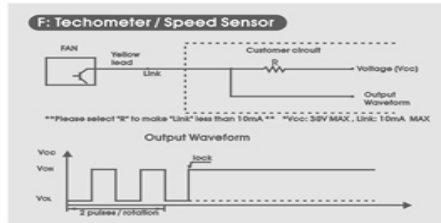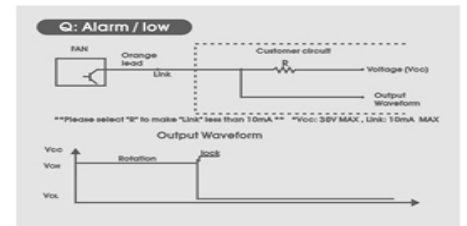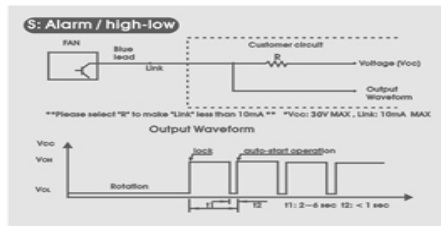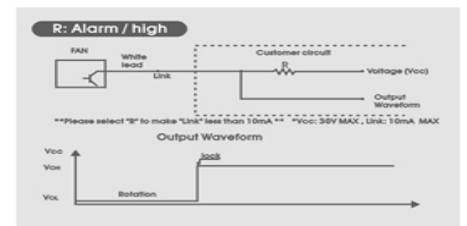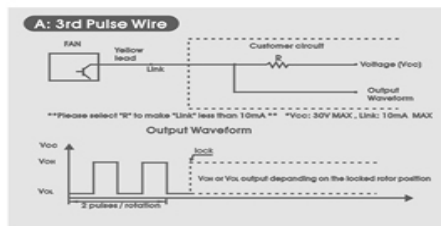

DESCRIPTION OF MODEL NO & SPECIFICATION






<u>CC</u>	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>
Brand	Type of Fan	W*L	Bearing type	Voltage	Speed	n
Chiefly Fan		12038	S	5	H	L
	CASE FAN	120*120*38mm	Sleeve	5V	High	Lead wire
	C	12032	B	12	M	T
	Rounded DC	120*120*32mm	2 Ball	12V	Medium	Terminal type
	D	12025	C	24	L	
	Suspended	120*120*25mm	1B1S	24V	Low	
	B	9225	A	48	HH	
	Blower	92*92*25mm	CERAMIC	48V	Double High	
	H				P	
	Ultra High				PWM	

NOISE LEVEL RANGE IS DEPENDING ON THE SPEED AND MODEL SELECTED

DC BRUSHLESS FAN GENERAL SPECIFICATION

DC FAN	Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions	
		(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH	(mm)
	CC12738B24HH	24	182.90	0.70	16.80	3600	55.00	296	127x127x38	
	CC12738B24H	24	159.40	0.50	12.00	3200	51.00			
	CC12738B12M	12	135.90	0.67	8.04	2800	47.00			
	CC12738B24M	24	135.90	0.32	7.68	2800	47.00			
	CC12738B12L	12	119.90	0.42	5.04	2400	43.00			
	CC12738B24L	24	119.90	0.26	6.24	2400	43.00			
	CC 12038B12H	12	121.00	0.60	7.00	3000	45.00	266	120x120x38	
	CC 12038B24H	24	121.00	0.36	8.60	3000	45.00			
	CC 12038B48H	48	121.00	0.28	13.44	3000	45.00			
	CC 12038B12M	12	107.00	0.45	5.40	2500	33.00			
	CC 12038B24M	24	107.00	0.28	6.72	2500	33.00			
	CC 12038B48M	48	107.00	0.20	9.60	2500	33.00			
	CC 12038B12L	12	95.00	0.28	3.36	2000	26.00			
	CC 12038B24L	24	95.00	0.14	3.36	2000	26.00			
	CC 12038B48L	48	95.00	0.13	6.24	2000	26.00			
	CC 12032B12H	12	120.00	0.60	7.20	3750	49.80	250	120x120x32	
	CC 12032B24H	24	120.00	0.45	10.80	3750	49.80			
	CC 12032B48H	48	120.00	0.23	11.00	3750	49.80			
	CC 12032B12M	12	112.00	0.50	6.00	3000	46.30			
	CC 12032B24M	24	112.00	0.28	6.70	3000	46.30			
	CC 12032B48M	48	112.00	0.18	8.60	3000	46.30			
	CC 12032B12L	12	95.00	0.32	3.80	2900	41.67			
	CC 12032B24L	24	95.00	0.22	5.30	2900	41.67			
	CC 12032B48L	48	95.00	0.15	7.20	2900	41.67			
	CC 12025B12H	12	106.37	0.42	5.04	3000	51.00	164	120x120x25	
	CC 12025B24H	24	106.37	0.23	5.52	3000	51.00			
	CC 12025B48H	48	106.37	0.16	7.68	3000	51.00			
	CC 12025B12M	12	87.02	0.27	3.24	2500	46.00			
	CC 12025B24M	24	87.02	0.15	3.60	2500	46.00			
	CC 12025B48M	48	87.02	0.13	6.24	2500	46.00			
	CC 12025B12L	12	70.14	0.16	1.92	2000	39.00			
	CC 12025B24L	24	70.14	0.12	2.88	2000	39.00			
	CC 12025B48L	48	70.14	0.10	4.80	2000	39.00			
		CC 12025B12H-2	12	88.00	0.36	4.32	3000			45.00
CC 12025B24H-2		24	88.00	0.24	5.76	3000	45.00			
CC 12025B48H-2		48	82.00	0.10	4.80	2400	41.10			
CC 12025B12M-2		12	75.00	0.25	3.00	2500	42.00			
CC 12025B24M-2		24	75.00	0.18	4.32	2500	42.00			
CC 12025B48M-2		48	73.00	0.08	3.84	2100	37.30			
CC 12025B12L-2		12	62.00	0.14	1.68	2000	25.00			
CC 12025B24L-2		24	62.00	0.10	2.40	2000	25.00			
CC 12025B48L-2		48	61.00	0.06	2.88	1800	23.10			

DC BRUSHLESS FAN GENERAL SPECIFICATION

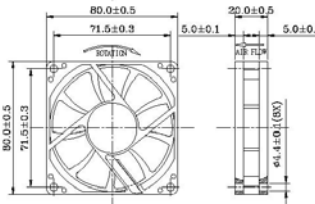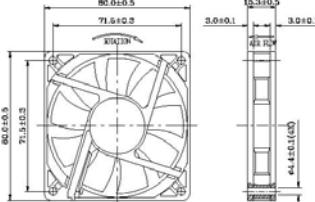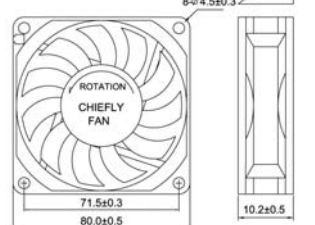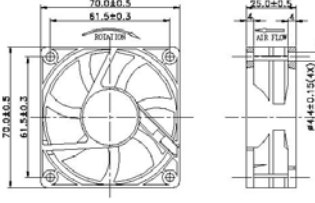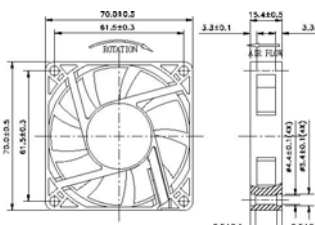DC FAN	Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions
		(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH (mm)
	CC 8020B5H	5	27.30	0.40	5.16	2600	28.00	70	80x80x20
	CC 8020B12H	12	32.21	0.19	2.28	2800	29.00		
	CC 8020B24H	24	27.30	0.15	3.60	2600	28.00		
	CC 8020B12M	12	27.62	0.13	1.56	2400	26.50		
	CC 8020B24M	24	27.62	0.13	3.12	2400	26.50		
	CC 8020B12L	12	24.16	0.12	1.44	2100	23.00		
	CC 8015B5H	5	31.25	0.28	1.40	3000	32.50	50	80x80x15
	CC 8015B12H	12	35.77	0.28	2.76	3500	35.50		
	CC 8015B24H	24	35.77	0.20	4.50	3500	35.50		
	CC 8015B5M	5	25.96	0.20	1.00	2500	27.00		
	CC 8015B12M	12	31.25	0.22	2.04	3000	32.00		
	CC 8015B24M	24	31.25	0.13	3.12	3000	32.00		
	CC 8015B5L	5	21.62	0.11	0.55	2100	24.00		
	CC 8015B12L	12	25.96	0.16	1.32	2500	26.50		
	CC 8015B24L	24	25.96	0.11	2.64	2500	26.50		
	CC 8010S12H	12	30.25	0.24	2.90	3500	33.86	46	80x80x10
	CC 8010S24H	24	30.25	0.14	3.40	3500	33.86		
	CC 8010S12M	12	26.53	0.18	2.20	3000	30.17		
	CC 8010S24M	24	26.53	0.11	2.40	3000	30.17		
	CC 8010S12L	12	21.73	0.12	1.40	2500	26.51		
	CC 8010S24L	24	21.73	0.08	1.90	2500	26.51		
	CC 7025B5HH	5	43.78	0.35	1.75	5000	41.00	61	70x70x25
	CC 7025B12HH	12	43.78	0.35	4.20	5000	41.00		
	CC 7025B24HH	24	43.78	0.21	5.04	5000	41.00		
	CC 7025B5H	5	39.40	0.29	1.45	4500	39.00		
	CC 7025B12H	12	39.40	0.25	3.00	4500	39.00		
	CC 7025B24H	24	39.40	0.17	4.08	4500	39.00		
	CC 7025B5M	5	36.00	0.23	1.15	4000	36.00		
	CC 7025B12M	12	36.00	0.21	2.52	4000	36.00		
	CC 7025B24M	24	36.00	0.14	3.36	4000	36.00		
	CC 7025B5L	5	30.60	0.17	0.85	3500	33.00		
	CC 7025B12L	12	30.60	0.16	1.92	3500	33.00		
	CC 7025B24L	24	30.60	0.10	2.40	3500	33.00		
	CC 7015B5H	5	25.27	0.28	1.40	3200	32.20	46	70x70x15
	CC 7015B12H	12	31.96	0.24	2.88	4000	37.00		
	CC 7015B24H	24	31.96	0.16	3.84	4000	37.00		
	CC 7015B5M	5	22.11	0.23	1.15	2800	27.40		
	CC 7015B12M	12	27.64	0.17	2.04	3500	34.00		
	CC 7015B24M	24	27.64	0.12	2.88	3500	34.00		
	CC 7015B5L	5	19.02	0.18	0.90	2400	23.50		
	CC 7015B12L	12	23.77	0.11	1.32	3000	29.50		
	CC 7015B24L	24	23.77	0.09	2.16	3000	29.50		

DC BRUSHLESS FAN GENERAL SPECIFICATION

DC FAN

Model No.

Voltage

Air Flow

Current

Power

Speed

Noise

Weight

Dimensions

(VDC)

(CFM)

(A)


(W)

(RPM)


(dBA)

(g)


L×W×H (mm)

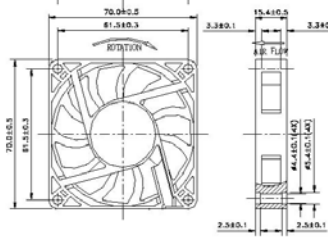


CC 7015B5H-2	5	27.00	0.30	1.50	3200	29.50	46	70×70×15
CC 7015B12H-2	12	30.20	0.23	2.76	4000	35.00		
CC 7015B24H-2	24	30.20	0.16	3.84	4000	35.00		
CC 7015B5M-2	5	23.65	0.25	1.25	2800	27.50		
CC 7015B12M-2	12	26.10	0.16	1.92	3500	32.00		
CC 7015B24M-2	24	26.10	0.12	2.88	3500	32.00		
CC 7015B5L-2	5	20.28	0.20	1.00	2400	24.50		
CC 7015B12L-2	12	22.00	0.11	1.32	3000	28.00		
CC 7015B24L-2	24	22.00	0.09	2.16	3000	28.00		

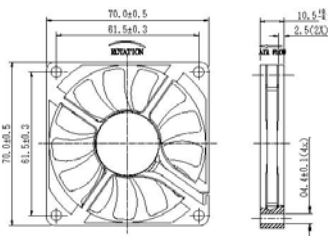


CC 7010B5HH	5	20.45	0.25	1.25	3200	33.80	33	70×70×15
CC 7010B12HH	12	24.71	0.34	4.08	4000	33.80		
CC 7010B24HH	24	24.71	0.18	4.32	4000	33.80		
CC 7010B5H	5	19.42	0.20	1.00	3000	31.40		
CC 7010B12H	12	18.53	0.20	2.40	3000	31.40		
CC 7010B24H	24	18.53	0.11	2.64	3000	31.40		
CC 7010B5M	5	14.83	0.18	0.90	2400	26.50		
CC 7010B12M	12	14.83	0.13	1.56	2400	26.50		
CC 7010B24M	24	14.83	0.09	2.16	2400	26.50		
CC 7010B5L	5	10.59	0.14	0.70	1800	20.20		
CC 7010B12L	12	10.59	0.10	1.20	1800	20.20		
CC 7010B24L	24	10.59	0.07	1.68	1800	20.20		

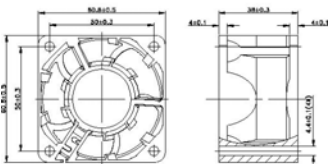

CC 6038A12HH	12	65.30	1.85	22.20	11500	58.00	42	60×60×38
CC 6038A24HH	24	65.30	1.35	32.40	11500	58.00		
CC 6038A12H	12	60.17	1.55	18.60	10500	56.00		
CC 6038A24H	24	60.17	1.25	30.00	10500	56.00		
CC 6038A12M	12	45.43	0.74	8.88	8000	50.12		
CC 6038A24M	24	45.43	0.70	16.80	8000	50.12		
CC 6038A12L	12	34.07	0.32	3.84	6000	43.87		
CC 6038A24L	24	34.07	0.30	7.20	6000	43.87		

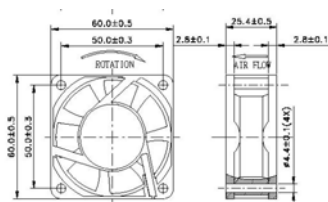

CC 6025B12HH	12	19.34	0.20	2.40	4500	34.00	60	60×60×25
CC 6025B24HH	24	19.34	0.17	4.08	4500	34.00		
CC 6025B12H	12	15.22	0.15	1.80	3600	27.50		
CC 6025B24H	24	15.22	0.13	3.12	3600	27.50		
CC 6025B12M	12	13.10	0.12	1.44	3100	24.50		
CC 6025B24M	24	13.10	0.10	2.40	3100	24.50		
CC 6025B12L	12	11.41	0.08	0.96	2700	23.00		
CC 6025B24L	24	11.41	0.08	1.92	2700	23.00		

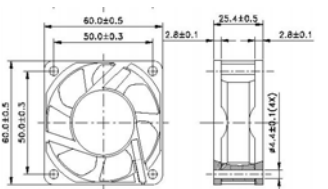

CC 6025B12HH-2	12	19.62	0.23	2.76	4500	31.00	60	60×60×25
CC 6025B24HH-2	24	19.62	0.18	4.32	4500	31.00		
CC 6025B12H-2	12	17.18	0.15	1.80	3600	24.00		
CC 6025B24H-2	24	17.18	0.14	3.36	3600	24.00		
CC 6025B12M-2	12	14.42	0.12	1.44	3100	23.50		
CC 6025B24M-2	24	14.42	0.10	2.40	3100	23.50		
CC 6025B12L-2	12	12.36	0.08	0.96	2700	23.00		
CC 6025B24L-2	24	12.36	0.08	1.92	2700	23.00		

DC BRUSHLESS FAN GENERAL SPECIFICATION

DC FAN	Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions
		(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH (mm)
	CC 6025A12HH-4	12	33.60	0.35	4.20	7500	52.00	60	60x60x25
	CC 6025A24HH-4	24	33.60	0.27	6.48	7500	52.00		
	CC 6025A12H-4	12	31.10	0.27	3.24	6800	48.60		
	CC 6025A24H-4	24	31.10	0.24	5.76	6800	48.60		
	CC 6025A48H-4	48	31.10	0.25	12.00	6800	48.60		
	CC 6025A12M-4	12	26.00	0.22	2.64	5800	45.00		
	CC 6025A24M-4	24	26.00	0.22	5.28	5800	45.00		
	CC 6025A48M-4	48	26.00	0.21	10.08	5800	45.00		
	CC 6025A12L-4	12	21.60	0.17	2.04	4800	38.00		
	CC 6025A24L-4	24	21.60	0.19	4.56	4800	38.00		
	CC 6025A48L-4	48	21.60	0.17	8.16	4800	38.00		
		CC 6025A12P-5	12	40.00	0.55	8.00	12-8500		
CC 6025A12H-5		12	38.00	0.55	6.60	8500	55.00		
CC 6025A12M-5		12	35.00	0.40	4.80	7000	52.00		
CC 6025A12L-5		12	24.00	0.25	3.00	5000	39.00		
	CC 6020B12HH	12	25.36	0.25	3.00	4500	36.20	42	60x60x20
	CC 6020B24HH	24	25.36	0.14	3.36	4500	36.20		
	CC 6020B12H	12	22.40	0.20	2.40	4000	32.40		
	CC 6020B24H	24	22.40	0.12	2.88	4000	32.40		
	CC 6020B12M	12	19.45	0.14	1.68	3500	27.80		
	CC 6020B24M	24	19.45	0.10	2.40	3500	27.80		
	CC 6020B12L	12	16.66	0.10	1.20	3000	25.20		
	CC 6020B24L	24	16.66	0.07	1.68	3000	25.20		
	CC 6015B12H	12	17.02	0.18	2.16	4500	36.50	33	60x60x15
	CC 6015B24H	24	17.02	0.12	2.88	4500	36.50		
	CC 6015B12M	12	14.80	0.14	1.68	4000	33.50		
	CC 6015B24M	24	14.80	0.11	2.64	4000	33.50		
	CC 6015B12L	12	12.57	0.12	1.44	3500	30.50		
	CC 6015B24L	24	12.57	0.10	2.40	3500	30.50		
	CC 6015B5H-2	5	18.40	0.43	2.15	5500	39.00	33	60x60x15
	CC 6015B12H-2	12	18.40	0.18	2.16	5500	39.00		
	CC 6015B24H-2	24	18.40	0.12	2.88	5500	39.00		
	CC 6015B5M-2	5	16.74	0.36	1.80	5000	36.50		
	CC 6015B12M-2	12	16.74	0.14	1.68	5000	36.50		
	CC 6015B24M-2	24	16.74	0.10	2.40	5000	36.50		
	CC 6015B5L-2	5	15.22	0.29	1.45	4500	34.00		
	CC 6015B12L-2	12	15.22	0.12	1.44	4500	34.00		
CC 6015B24L-2	24	15.22	0.09	2.16	4500	34.00			
	CC 6010B5H	5	19.56	0.33	1.65	5200	42.50	25	60x60x10
	CC 6010B12H	12	19.56	0.24	2.88	5200	42.50		
	CC 6010B5M	5	15.50	0.29	1.45	4300	37.00		
	CC 6010B12M	12	15.50	0.19	2.28	4300	37.00		
	CC 6010B5L	5	12.85	0.21	1.05	3600	32.00		
	CC 6010B12L	12	12.85	0.13	1.56	3600	32.00		

DC BRUSHLESS FAN GENERAL SPECIFICATION

DC FAN	Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions
		(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH (mm)
	CC 4010B5H-3	5	7.20	0.24	1.20	6500	33.00	17	40x40x10
	CC 4010B12H-3	12	7.20	0.12	1.44	6500	33.00		
	CC 4010B5M-3	5	6.11	0.18	0.90	5500	27.50		
	CC 4010B12M-3	12	6.11	0.09	1.08	5500	27.50		
	CC 4010B5L-3	5	4.98	0.16	0.80	4500	23.50		
	CC 4010B12L-3	12	4.98	0.08	0.96	4500	23.50		
	CC 4010B5H-4	5	5.80	0.18	0.90	6500	28.50	17	40x40x10
	CC 4010B12H-4	12	5.80	0.09	1.08	6500	28.50		
	CC 4010B5M-4	5	5.20	0.14	0.70	5500	24.50		
	CC 4010B12M-4	12	5.20	0.07	0.84	5500	24.50		
	CC 4010B5L-4	5	4.60	0.12	0.60	4500	23.00		
	CC 4010B12L-4	12	4.60	0.06	0.72	4500	23.00		
	CC 4007B5H	5	6.51	0.25	1.30	7500	33.85	10	40x40x07
	CC 4007B12H	12	6.51	0.13	1.60	7500	33.85		
	CC 4007B5M	5	5.40	0.23	1.20	6500	29.96		
	CC 4007B12M	12	5.40	0.11	1.30	6500	29.96		
	CC 3515A5HH	5	7.60	0.28	1.40	8000	30.00	9	35x35x15
	CC 3515A12HH	12	8.55	0.16	1.92	9000	34.00		
	CC 3515A5H	5	6.65	0.22	1.10	7000	26.00		
	CC 3515A12H	12	7.60	0.14	1.68	8000	30.00		
	CC 3515A5M	5	5.70	0.17	0.85	6000	23.00		
	CC 3515A12M	12	6.65	0.11	1.32	7000	26.00		
	CC 3515A5L	5	4.75	0.12	0.60	5000	19.00		
CC 3515A12L	12	5.70	0.08	0.96	6000	23.00			
	CC 3015A5HH	5	5.70	0.32	1.60	8000	28.50	8	30x30x15
	CC 3015A12HH	12	6.18	0.18	2.16	9000	30.00		
	CC 3015A5H	5	5.29	0.27	1.35	7000	27.00		
	CC 3015A12H	12	5.70	0.16	1.92	8000	28.50		
	CC 3015A5M	5	4.53	0.24	1.20	6000	26.00		
	CC 3015A12M	12	5.29	0.14	1.68	7000	27.00		
	CC 3015A5L	5	3.78	0.16	0.80	5000	25.00		
	CC 3015A12L	12	4.53	0.12	1.44	6000	26.00		
	CC 3010B5H	5	3.68	0.18	0.90	8000	24.50	8	30x30x10
	CC 3010B12H	12	3.68	0.09	1.08	8000	24.50		
	CC 3010B5M	5	3.11	0.12	0.60	7000	23.50		
	CC 3010B12M	12	3.11	0.08	0.96	7000	23.50		
	CC3010B5L	5	2.55	0.09	0.45	6000	22.50		
	CC 3010B12L	12	2.55	0.06	0.72	6000	22.50		
	CC 3010B5H-1	5	4.23	0.22	1.10	9500	28.46	8	30x30x10
	CC 3010B12H-1	12	4.23	0.13	1.50	9500	28.46		
	CC 3010B5M-1	5	3.56	0.20	1.00	8000	23.23		
	CC 3010B12M-1	12	3.56	0.11	1.30	8000	23.23		
	CC 3010B5L-1	5	2.45	0.12	0.60	5500	19.26		
	CC 3010B12L-1	12	2.45	0.06	0.70	5500	19.26		

DC BRUSHLESS FAN GENERAL SPECIFICATION

DC FAN	Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions
		(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH (mm)
	CC 3006B5H	5	3.87	0.20	1.00	8000	27.31	6	30x30x06
	CC 3006B12H	12	3.87	0.12	1.40	8000	27.31		
	CC 3006B5M	5	2.32	0.12	0.60	6000	20.92		
	CC 3006B12M	12	2.32	0.10	1.20	6000	20.92		
	CC 2510A5H	5	2.01	0.18	0.90	11000	25.00	7	25x25x10
	CC 2510A12H	12	2.01	0.08	0.96	11000	25.00		
	CC 2510A5M	5	1.56	0.11	0.55	9000	23.50		
	CC 2510A12M	12	1.56	0.06	0.72	9000	23.50		
	CC 2510A5L	5	1.27	0.07	0.35	7000	22.50		
	CC 2510A12L	12	1.27	0.05	0.60	7000	22.50		
	CC 2510B5H-1	5	2.85	0.22	1.10	13000	30.26	7	25x25x10
	CC 2510B12H-1	12	2.85	0.13	1.50	13000	30.26		
	CC 2510B5M-1	5	2.17	0.20	1.00	10000	24.76		
	CC 2510B12M-1	12	2.17	0.11	1.30	10000	24.76		
	CC 2510B5L-1	5	1.52	0.14	0.70	7000	19.47		
	CC 2510B12L-1	12	1.52	0.10	1.20	7000	19.47		
	CC 2006S5H	5	1.12	0.10	0.50	14000	27.10	5	20x20x06
	CC 2006S12H	12	1.12	0.06	0.72	14000	27.10		
	CCB 12032A12HH	12	32.53	1.20	14.40	3200	53.60	260	120x120x32
	CCB 12032A24HH	24	32.53	0.81	19.44	3200	53.60		
	CCB 12032A12H	12	28.46	0.90	10.80	2800	50.70		
	CCB 12035A24H	24	28.46	0.61	14.64	2800	50.70		
	CCB 12032A12M	12	24.40	0.60	7.20	2400	47.53		
	CCB 12032A24M	24	24.40	0.41	9.84	2400	47.53		
	CCB 12032A12L	12	20.33	0.45	5.40	2000	43.40		
	CCB 12032A24L	24	20.33	0.31	7.44	2000	43.40		
	CCB 9733B12H	12	28.21	1.01	12.60	3500	59.20	132	97x97x33
	CCB 9733B24H	24	28.21	0.51	13.92	3500	59.20		
	CCB 9733B48H	48	28.21	0.30	16.80	3500	59.20		
	CCB 9733B12M	12	26.86	0.56	7.80	3000	53.80		
	CCB 9733B24M	24	26.86	0.35	9.60	3000	53.80		
	CCB 9733B48M	48	26.86	0.19	10.56	3000	53.80		
	CCB 9733B12L	12	20.25	0.31	4.32	2500	49.90		
	CCB 9733B24L	24	20.25	0.23	6.24	2500	49.90		
	CCB 9733B48L	48	20.25	0.11	5.76	2500	49.90		

DC BRUSHLESS FAN GENERAL SPECIFICATION


DC BLOWER

Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions
	(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH (mm)
CCB 7528B12HH	12	9.00	0.31	3.72	3200	42.00	75	75x75x28
CCB 7528B24HH	24	9.00	0.22	5.28	3200	42.00		
CCB 7525B5H	5	6.76	0.37	1.85	2400	31.50		
CCB 7528B12H	12	7.86	0.22	2.64	2800	36.50		
CCB 7528B24H	24	7.86	0.16	3.84	2800	36.50		
CCB 7528B5M	5	5.98	0.25	1.25	2100	27.00		
CCB 7528B12M	12	6.76	0.13	1.56	2400	31.50		
CCB 7528B24M	24	6.76	0.12	2.88	2400	31.50		
CCB 7528B5L	5	3.68	0.17	0.85	1800	23.14		
CCB 7528B12L	12	5.98	0.12	1.44	2100	27.00		
CCB 7528B24L	24	5.98	0.10	2.40	2100	27.00		

DC CAP FAN

Model No.	Voltage	Air Flow	Current	Power	Speed	Noise	Weight	Dimensions
	(VDC)	(CFM)	(A)	(W)	(RPM)	(dBA)	(g)	LxWxH (mm)
CCD 4007B5H	5	6.51	0.25	1.30	7500	33.85	7	40x40x07
CCD 4007B12H	12	6.51	0.13	1.60	7500	33.85		
CCD 4007B5M	5	5.40	0.23	1.20	6500	29.96		
CCD 4007B12M	12	5.40	0.11	1.30	6500	29.96		
CCD 4507B5H	5	8.20	0.23	1.20	6500	33.43	8	45x45x07
CCD 4507B12H	12	8.20	0.13	1.60	6500	33.43		
CCD 4507B5M	5	7.43	0.22	1.10	6000	31.56		
CCD 4507B12M	12	7.43	0.11	1.30	6000	31.56		
CCD 5010B5H	5	11.06	0.22	1.10	5300	30.15	10	50x50x10
CCD 5010B12H	12	11.06	0.16	1.90	5300	30.15		
CCD 5010B5M	5	9.42	0.18	0.90	4500	26.09		
CCD 5010B12M	12	9.42	0.08	1.00	4500	26.09		
CCD 5010B5L	5	7.30	0.12	0.60	3500	20.82		
CCD 5010B12L	12	7.30	0.07	0.80	3500	20.82		

DC CROSS FLOW FAN

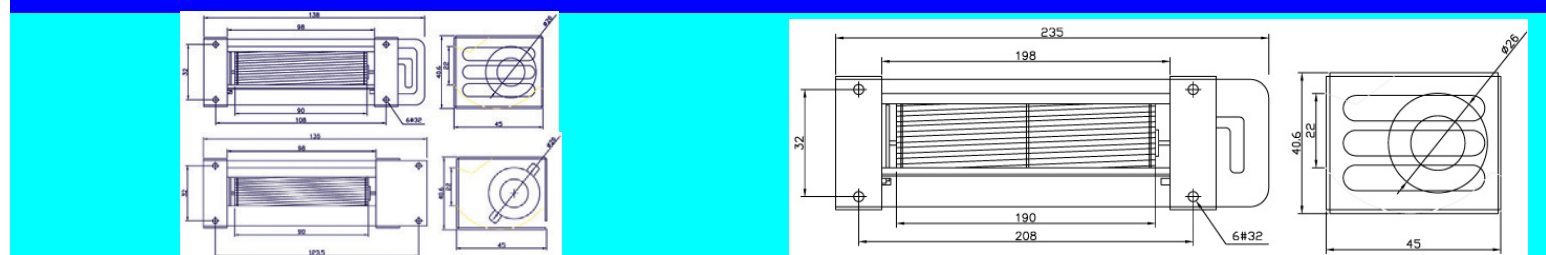


CPU COOLER GENERAL SPECIFICATION

COPPER GPU COOLERS


SPA-82CU | Based on 80mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation (Easy Clip)
- » Crystal clear 80 mm fan w/blue LED light
- » Manual fan controller w/fan Alarm
- » Blue LED Light switch (on/off)
- » Low noise 17-21db
- » Pure Copper material
- » Rubber coated 3pin fan connector
- » Small size, perfect for small installation
- » Weight 616g

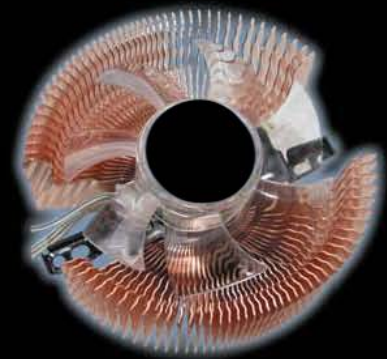


SPA-92CU | Based on 92mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless Installation (Easy Clip)
- » Crystal clear 92mm fan w/blue LED light
- » Manual fan controller w/fan Alarm
- » Blue LED Light switch (on/off)
- » Low noise 17-27db
- » Pure Copper material
- » Rubber coated 3pin fan connector
- » Medium size, perfect for all installations
- » Weight 692g

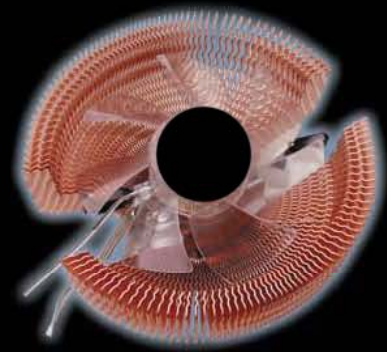

SPA-122CU | Based on 120mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation (Easy Clip)
- » Crystal clear 120 mm fan w/blue LED light
- » Manual FAN controller w/fan Alarm
- » Blue LED Light switch (on/off)
- » Low noise 12-24db
- » Pure Copper material
- » Rubber coated 3pin fan connector
- » Extreme size, perfect for high performance
- » Weight 785g

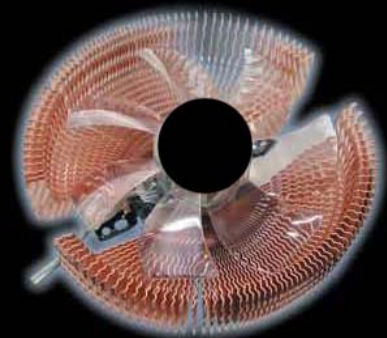

CPU COOLER GENERAL SPECIFICATION

ALUMINIUM/COPPER CPU COOLERS


SPA-82CUAL | Based on 80mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation (Easy Clip)
- » Manual fan controller w/fan Alarm
- » Small size, perfect for small installation
- » Low noise 17-21db
- » Light aluminium and Copper material
- » Rubber coated 3pin fan connector
- » Crystal clear 80mm fan
- » Weight 397g




SPA-92CUAL | Based on 92mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless Installation
- » Manual fan controller w/fan Alarm
- » Low noise 17-27db
- » Crystal clear 92 mm fan
- » Light aluminium and Copper material
- » Rubber coated 3pin fan connector
- » Medium size, perfect for all installations
- » Weight 442g

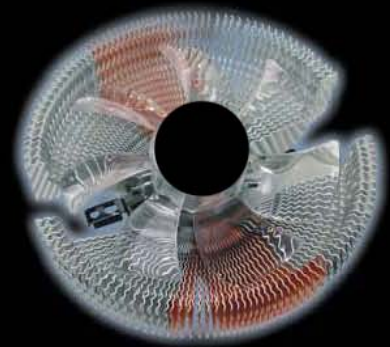

SPA-122CUAL | Based on 120mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation
- » Manual fan controller w/fan Alarm
- » Low noise 12-24db
- » Crystal clear 120mm fan
- » Light aluminium and Copper material
- » Rubber coated 3pin fan connector
- » Extreme size, perfect for high performance
- » Weight 492g

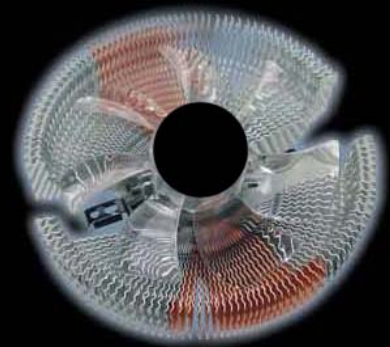

CPU COOLER GENERAL SPECIFICATION

ALUMINIUM OEM GPU COOLERS

SPA-92AL | Based on 92mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation
- » Crystal clear 92mm fan
- » Light aluminium material
- » Rubber coated 3pin fan connector
- » Low Weight 240g
- » Medium size, perfect for system builders
- » Noise level depends on mainboard control
- » Optimized for OEM production
- » OEM/Bulk package



SPA-122AL | Based on 120mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless Installation
- » Black 120mm fan
- » Light aluminium material
- » Rubber coated 3pin fan connector
- » Extreme size, perfect for huge systems
- » Noise lev. max. 24db depends on mainboard
- » Optimized for OEM production
- » OEM/Bulk package
- » Low Weight 297g, suitable for PC Transport



SPA-122ALB | Based on 120mm FAN

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation
- » Crystal Blue 120mm fan w/LED light
- » Manual fan controller w/fan Alarm
- » Noise level 12-24db
- » Light aluminium material
- » Rubber coated 3pin fan connector
- » Extreme size, perfect for huge systems
- » Optimized for OEM production
- » OEM/Bulk package
- » Low Weight 297g, suitable for PC Transport



CPU COOLER GENERAL SPECIFICATION

HEAT PIPE GAMER COOLERS (NEW SERIES)

HP-937S | Heat Pipe Tower Cooler

- » Supports 754/939/940, AM2, LGA775
- » FlexQ Toolless installation
- » Frosted White 80mm LED fan
- » Toolless fan installation
- » Manual fan controller w/fan Alarm
- » Light black aluminium material
- » 3 Huge U-Heat pipe with direct CPU contact
- » 3pin fan connector
- » Designed for Extreme Gamer Systems
- » Weight: 374g




CPU COOLER GENERAL SPECIFICATION

GFX COOLERS


SVC-705CU | based on 60mm FAN

- › GFX Cooler
- › Use for most AMD & Intel systems
- › Light aluminium material
- › Easy installation
- › Black 60 mm fan
- › Manual fan controller w/fan Alarm
- › 12-17dB noise level
- › Optimized for system integrators
- › Weight: 169g

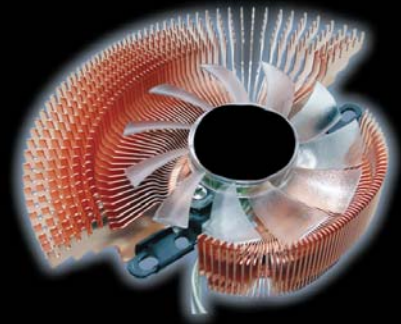

SVC-710CU | based on 80mm FAN

- › Supports most ATI & NVIDIA Cards
- › Easy installation
- › Suitable for gamers
- › Crystal clear 80mm fan
- › Manual fan controller w/fan Alarm
- › Pure copper material
- › Rubber coated 3pin fan connector
- › Optimized for midrange/
high-end GFX Cards
- › Includes 8 aluminium BGA
RAM heat sinks
- › DOES NOT SUPPORT 8800 Cards
- › Weight: 280g

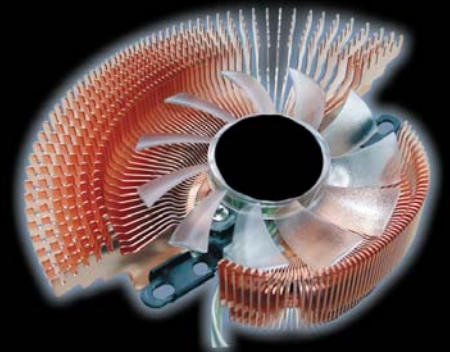

SVC-705AL | based on 60mm FAN

- › Supports most ATI & NVIDIA Cards
- › Easy installation
- › Crystal clear 60mm fan
- › Manual fan controller w/fan Alarm
- › Light aluminium material
- › Rubber coated 3pin fan connector
- › Optimized for midrange GFX Cards
- › Includes 8 aluminium BGA
RAM heat sinks
- › DOES NOT SUPPORT 8800 Cards
- › Weight: 190g



CPU&VGA COOLER GENERAL SPECIFICATION

MEDIA CENTER & GFX COOLERS

SPA-3392 | Media Center & GFX Cooler


- » Combo Cooler for CPU & GFX
- » Compatible with most AMD & Intel systems
- » Pure Copper material
- » Easy installation
- » Black 60mm fan
- » Manual fan controller w/fan Alarm
- » 12-17dB noise level
- » Optimized for end user systems
- » Light weight 250g

Support GFX List

- » Most ATI 9000-X1800 series
- » Most NVIDIA MX-7900 series

Support List

- » AMD K8 Socket 754/939
- » AMD Turion Socket 754
- » AMD K8 socket AM2
- » Intel Pentium Mobile, Core Duo, Core 2 Duo
- » Intel Core 2 Duo socket LGA 775
- » Intel P4 socket 478 & 479/478 combo
- » NB: NO SUPPORT FOR PRESCOTT CPU Class



SPA-3393 | Media Center & GFX Cooler

- » Combo Cooler for CPU & GFX
- » Use for most AMD & Intel systems
- » Light aluminum material
- » Easy Installation
- » Black 60mm fan
- » Manual fan controller w/fan Alarm
- » 12-17dB noise level
- » Optimized for system Integrators
- » Weight 169g

Support GFX List

- » Supports most ATI 9000-X1800 series
- » Supports most NVIDIA MX-7900 series


Support List

- » AMD K8 Socket 754/939
- » AMD Turion Socket 754
- » AMD K8 socket AM2
- » Intel Pentium Mobile, Core Duo and Core 2 Duo
- » Intel Core 2 Duo socket LGA 775
- » Intel P4 socket 478 & 479/478 combo
- » NB: NO SUPPORT FOR PRESCOTT CPU



SVC-737CU | based on 60mm FAN

- » Supports most ATI & NVIDIA Cards
- » FlexQ Toolless installation
- » Suitable for gamers
- » Crystal clear 60mm fan
- » Manual fan controller w/fan Alarm
- » Pure copper material
- » Rubber coated 3pin fan connector
- » Optimized for midrange/high-end GFX Cards
- » Includes 8 aluminium BGA RAM heat sinks
- » DOES NOT SUPPORT 8800 Cards
- » Weight: 365g



CHIPSET COOLER GENERAL SPECIFICATION

CHIPSET COOLERS


NB-400AL | For AMD & Intel boards

- » Use for most AMD & Intel boards
- » Light aluminium material
- » Toolless installation
- » 0dB noise level
- » Optional support for 40mm fan
- » Weight: 50g



NB-400CU | For AMD & Intel boards

- » Use for most AMD & Intel boards
- » Pure copper material
- » Toolless installation
- » Included crystal clear 40mm fan
- » 0dB noise level (fanless)
- » 12dB with included 40mm fan
- » Weight: 135g




HVC-771S | For AMD & Intel boards

- » Use for most AMD & Intel boards
- » FlexQ Toolless installation
- » Toolless fan installation
- » Light aluminium material
- » 1U heat pipe with direct chipset contact
- » Frosted White 60mm LED fan
- » Less than 18dB noise level
- » Weight: 140g



FAN ACCESSORY GENERAL PHOTO





朋增實業有限公司

Chiefly-Choice Co.,Ltd

台北縣汐止市康寧街340號3樓

TEL:886-2-2692-8816 #10 FAX:886-2-2692-7030

e-mail address:james@chiefly-choice.com.tw



www.chiefly-choice.com.tw